


TIS Mars Panel 10 Gangs with Thermostat

Model: MRS-AC10G

Data Sheet Rev 1.1

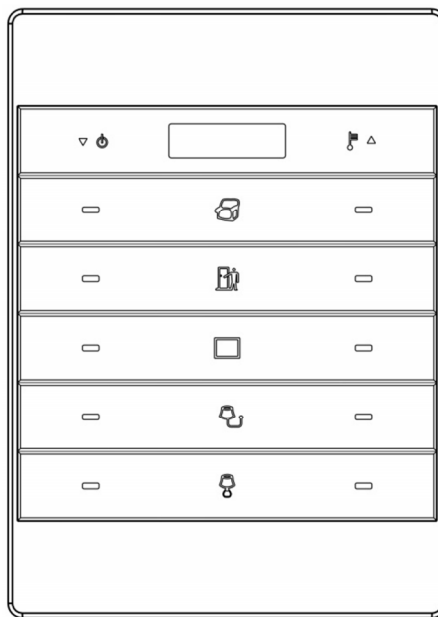

Safety instructions

Electrical equipment may only be installed and fitted by electrically skilled persons. Failure to observe the instructions may cause damage to the device and other hazards. These instructions are an integral part of the product, and must remain with the end customer.

Basic information

This device is a product of the TIS system. It is a wall mount Panel with 12 buttons thermostat and OLED screen that can be programmed to control lights, air condition, scenes, curtain, TV, and all other devices on the same TIS network, technical knowledge obtained in TIS training courses is a prerequisite to proper understanding how to install device. Advanced Programming knowledge about software obtained in the advanced training courses.

Intended use

To control home appliance, lights on/off, scene and curtain in each room or area.

Product Characteristics

Inputs	Temp sensor IR receiver Using Panel Addition	Resistive Temp Sensor TIS Infrared code receiver 2-3 Digital Inputs
Outputs	Using Panel Addition 3R Using Panel Addition 3DL-12V Using Panel Addition 2DL-IRE	3 Relay Output 3A/5A 12V DC 50mA Output IR Emitter
TIS Bus	Number of devices on 1 line Bus voltage Current consumption	Max. 64 12-32 V DC <40 mA / 24 V DC
Protection	Protection	Reverse Polarity Protection ESD Protection
Reaction time		approx. 20ms
Mounting	Wall mount	by 2 screws on the back box (UK, Europe, US)
Connection terminal	Data	2 mail pins connectors to fit in panel addition
Operating and display elements	Display 12 Buttons Indicator LED Backlight TIS bus Upgrading	0.9 inch OLED Screen For controlling lights, Air condition scene, etc... 10 Blue and Red LED + 1 Green LED 5 pairs of White neon LED TIS Protocol massages and commands 1 X mini USB for up to date upgrading.
Functions	1 Press Long Press Double click IR receiver	ON/OFF/Scene Dim or ramp the lights Extra Scene Music, scene, lights control
Weight	Without packaging	150 g
Dimensions	Width x length x height	90 * 125 * 15-21 peak
Housing	Materials Casing color Internal Parts color	PC anti fire Black/Titanium, Silver, White, Champaign, coal, Bronze or special color Black & White
Temperature range	Operation Storage Transport	-10...60°C -20...50°C -25...75°C
Air humidity		<85% non-condensing

For installation steps and wiring diagram please read “Mars Panel installation steps” and “Mars wiring diagram” documents.

Warranty

We provide a warranty as provided for by law.

Product serial number is provided by each device.

Please send the description of the defect with Product S/N to our dealer network.

info@tissmarthome.com

www.tissmarthome.com